


PERTII-AL-PERTII pipes

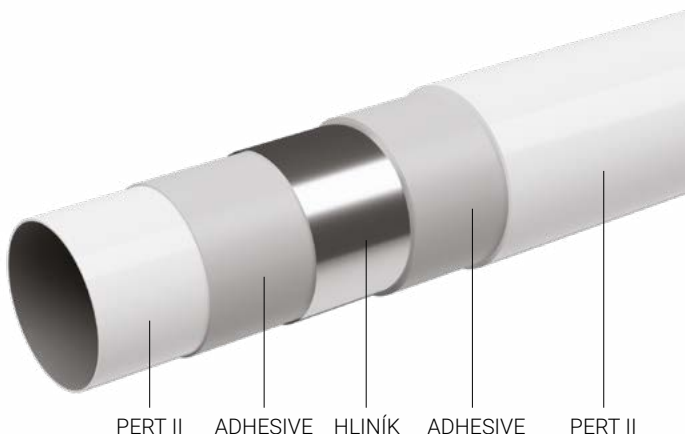

PERT II ADHESIVE HLINÍK ADHESIVE PERT II

We offer full range of multilayer pipes with a diameter from 16 to 32 mm.

The 5-layer construction is guarantee of long-term life and tightness.

Made of PERT II with strong aluminum core, and oxygen resistant barrier.

Laser-welded aluminum foil - lengthwise. The pipes are suitable for all heating and plumbing activities.

In accordance with EN ISO 21003. Rolls 50, 100, 200 m.

- water and pressure resistant
- destruction resistant
- with oxygen barrier
- low thermal expansion
- shape stabile
- low weight
- easy handling
- minimal damage
- during manipulation

- max. operating temperature: + 95°C
- max. short-term temperature: + 110°C
- max. pressure at 60°C: 10 Bar
- max. pressure at 95°C: 6 Bar

Code	Type	Dimensions	Packing m	Thickness of the AL layer
402001	PERT II - AL -PERT II	16 x 2	200	0,2
402002	PERT II - AL -PERT II	20 x 2	100	0,3
402003	PERT II - AL -PERT II	26 x 3	50	0,4
402004	PERT II - AL -PERT II	32 x 3	50	0,4

